






## Welcome Guide

www.sohnne.com

## **ASSEMBLY**

Assembly is very simple; insert the Gas Lift into the Alloy Base, then attach the seat.

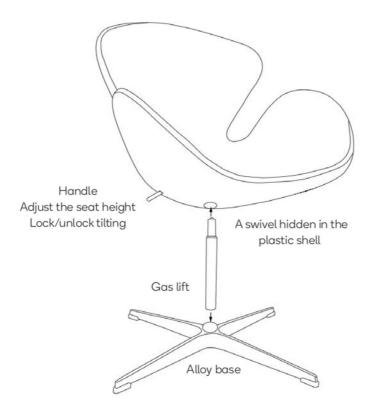

**Handle:** Pull the handle outward when you want the chair to tilt. Push the handle inward to lock the chair to an upright firm position. Do not adjust the handle if the chair is currently occupied.

## Notes:

The tilt mechanism is tightened in the factory for safety, and may be stiff at first. Over time, it will soften.

